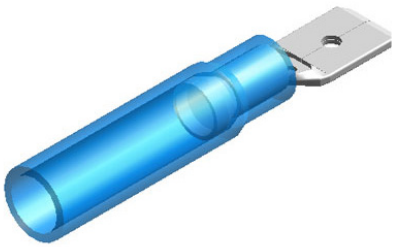
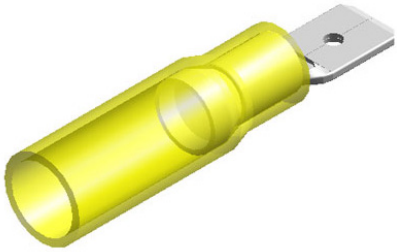

Our Insulated Heat Shrinkable Female Disconnectors are electro-tin plated for excellent conductivity and resistance to corrosion. They have a maximum temperature of 105˚C with 300 volts maximum electrical rating.

These crimp terminals are waterproof and have a maximum heat shrinkable temperature of 150˚C.

SPECIFICATION:

INSULATION MATERIAL: Heat Shrinkable Tube
PLATING: Electro-Tin Plated
TERMINAL MATERIAL: Brass
MAX. TEMPERATURE: 105˚C
MAX. SHRINK TEMPERATURE: 150˚C
MAX. ELECTRICAL RATING: 300 Volts

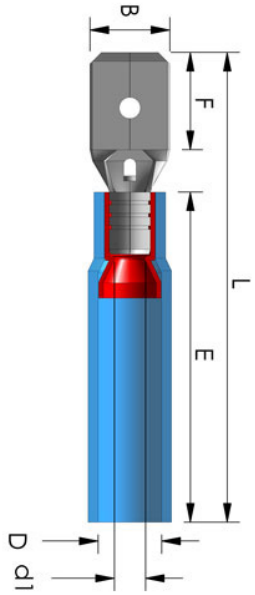

PART NUMBERS:

WIRE Ø mm²	PART NO.	DIMENSIONS (mm) B	L	E	F	D	D1	PACK QTY
22-16/0.5 - 1.5/RED	CHSPOM1	6.4	37.0	26.5	7.8	4.5	1.7	100
16-14/1.5 - 2.5/BLUE	CHSPOM2	6.4	37.0	26.5	7.8	5.5	2.	100
12-10/4 - 6/YELLOW	CHSPOM3	6.4	37.0	26.5	7.8	8.0	3.4	50

MAXIMUM ELECTRIC CURRENT

A.W.G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

NOTE:

1. MAXIMUM ELECTRICAL RATING: 300 VOLTS
2. SHRINK TEMP: 150 ℃
   OPERATING TEMP: -10 ℃ ~ 105 ℃
3. REINFORCEMENT SLEEVE:C TYPE SLEEVE
4. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
   INSULATED COLOR: RED
5. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
   INSULATED COLOR: BLUE
6. WIRE RANGE: 12-10 AWG / 4-6 mm²
   INSULATED COLOR: YELLOW

WIRE RANGE AWG/mm²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±2.00	E ±2.00	D ±0.50	d1 ±0.20
22-16 AWG 0.5-1.5 mm²	M1-6.4HC	0.8x6.4	6.35	7.8	37.0	26.5	4.5	1.7
16-14 AWG 1.5-2.5 mm²	M2-6.4HC	0.8x6.4	6.35	7.8	37.0	26.5	5.5	2.3
12-10 AWG 4-6 mm²	M5-6.4HC	0.8x6.4	6.35	7.8	37.0	26.5	7.5	3.4

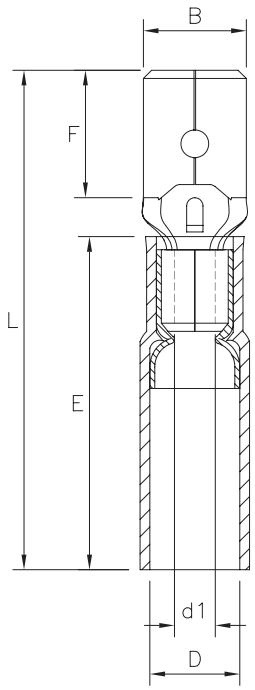

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk