




### DESCRIPTION:

Our range of insulated tabs and receptacles are suitable for wires from 0.5mm<sup>2</sup> to 6.0mm<sup>2</sup>. All types have a copper reinforcement sleeve and are made from copper-alloy, electro tinned. They feature high mechanical and dielectric resistant insulation, with heat resistant up to +75°C.

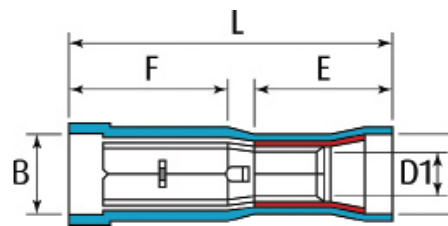

### SPECIFICATION:

#### PVC:

**MATERIAL:** Electro-tin plated copper  
**INSULATION:** Polyvinyl Chloride  
**APPROVALS:** RoHS compliant  
**MAX TEMPERATURE:** 75°C  
**MAX VOLTAGE:** 300V

#### NYLON:

**MATERIAL:** Electro-tin plated copper  
**INSULATION:** Nylon  
**APPROVALS:** RoHS compliant  
**MAX TEMPERATURE:** 105°C  
**MAX VOLTAGE:** 300V

### PART NUMBERS:

#### DIMENSIONS (mm)

COLOUR/WIRE Ø mm <sup>2</sup>	PART NO.		Max. elect. rating (A)	B	L	F	E	D	D1	PACK QTY
	PVC	NYLON								
0.5-1.5 RED	CIAB1F	CNIAB1F	10	4.0	23.0	8.5	10.0	4.3	1.7	100
1.5-2.5 BLUE	CIAB2F	CNIAB2F	15	4.0	23.0	8.5	10.0	5.0	2.3	100
	CIAB2F5	CNIAB2F5	15	5.0	23.0	8.5	10.0	5.0	2.3	100
4-6 YELLOW	CIAB3F	CNIAB3F	24	5.0	25.0	8.5	13.0	6.5	3.4	100