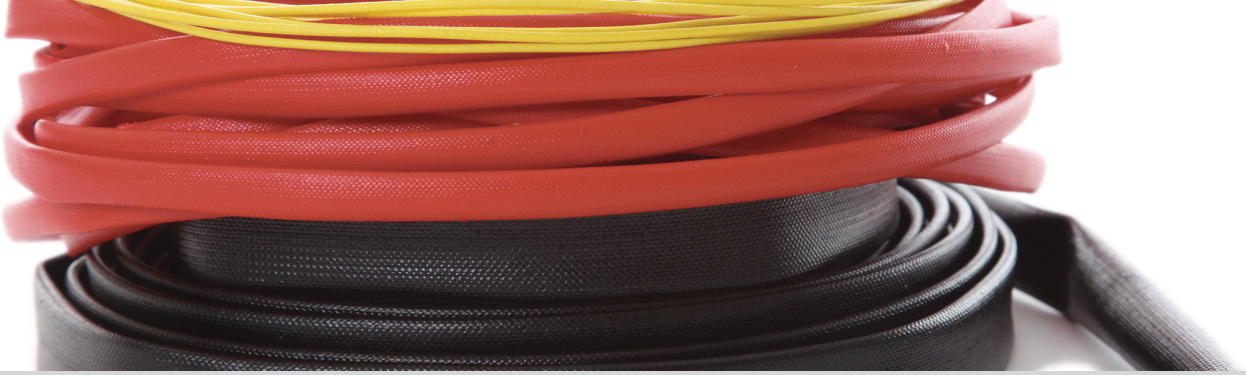

DESCRIPTION:

High quality braided glass fibre construction with an acrylic resin coating. The coating gives the sleeve excellent flexibility allied to high abrasion resistance and mechanical strength. Suitable for the internal wiring of all types of electrical machines. Ideal for high temperature rated domestic appliances, heating appliances and central heating boilers, protection and insulation of leads and wiring harness in lamps and vehicles.

MOQ's may apply to some types and sizes of vidaflex, please contact us for more details.

APPLICATIONS & COLOUR OPTIONS:

- Protection and insulation of leads and wiring harness in household appliances, lamps and vehicles.
- Insulation of the internal wiring of all types electrical machines.

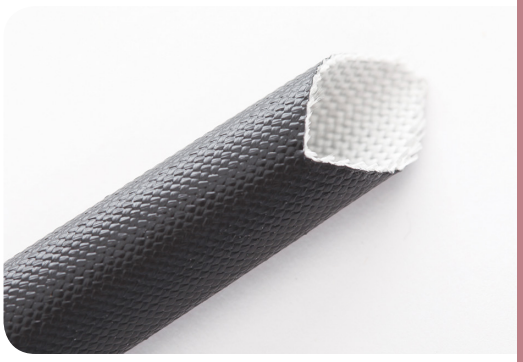

HOW TO ORDER:
Add the required colour to the end of the part number.

BLACK | YELLOW | RED OXIDE

SPECIFICATION:

MATERIAL: Acrylic resin coated braided glass fibre
OPERATING TEMPERATURE: -25°C to +155°C
INTERMITTENT TEMPERATURE: 200°C
DIALECTRIC STRENGTH: 2.5 kV
RESISTANCE TO FLAME: More than 45 seconds for 25mm
THERMAL CLASS: 155 (Class F) according to IEC 60085
RESISTANCE TO CHEMICALS: Acids, alkalis - excellent; organic solvents - swells but does not separate; copper corrosion - nil
STANDARDS: IEC 684-3 403/405 RoHS compliant
STANDARD COLOUR: Black

Other colours are available on request; minimum quantities apply; please contact us for more information.

PART NUMBERS:

PART NUMBER	NOMINAL INTERNAL DIA. (mm)	NOMINAL WALL THICKNESS (mm²)	COIL SIZE (m)
COILS			
VIDAFLEX 942 1.0	1.0	0.35	100
VIDAFLEX 942 2.0	2.0	0.35	100
VIDAFLEX 942 3.0	3.0	0.40	100
VIDAFLEX 942 4.0	4.0	0.45	100

Other lengths are available on request, please contact us for more information.

CABLECRAFT™
creative wiring solutions

betaduct CABLECRAFT COMPANY

nqa. ISO 9001 Registered UKAS QUALITY MANAGEMENT 015
CERTIFICATE NO. 9277

Link-up Registered
I.D. 22645

INVESTORS IN PEOPLE

CTT CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk
VAT NO. GB 639 920 900 • **CO. REG. NO.** 2478297

FILE NO. 6.7
ISSUE NO. 02

PART NUMBERS:

PART NUMBER	NOMINAL INTERNAL DIA. (mm)	NOMINAL WALL THICKNESS (mm²)	COIL LENGTH (m)
COILS			
VIDAFLEX 942 5.0	5.0	0.50	100
VIDAFLEX 942 6.0	6.0	0.50	100
VIDAFLEX 942 7.0	7.0	0.65	100
VIDAFLEX 942 8.0	8.0	0.65	100
VIDAFLEX 942 10.0	10.0	0.65	100
VIDAFLEX 942 12.0	12.0	0.70	100
VIDAFLEX 942 14.0	14.0	0.70	100
VIDAFLEX 942 16.0	16.0	0.70	100
VIDAFLEX 942 20.0	20.0	0.90	100
VIDAFLEX 942 25.0	25.0	0.90	100

Other lengths are available on request, please contact us for more information.

CABLECRAFT™
creative wiring solutions

betaduct
CABLECRAFT COMPANY

nqa. ISO 9001 Registered UKAS QUALITY MANAGEMENT 015
CERTIFICATE NO. 9277

Link-up empowered by Achilles
Registered
I.D. 22645

INVESTORS IN PEOPLE

CTT
CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk
VAT NO. GB 639 920 900 • **CO. REG. NO.** 2478297