Cablecraft

Technical Data.

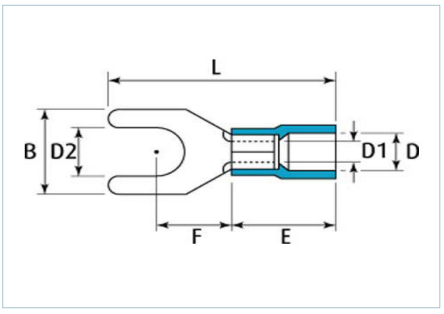

Pre-insulated nylon fork terminals.

Key features.

- Made from oxygen-free high conductivity copper
- Electro-tin plated for excellent conductivity and resistance to corrosion
- Create a secure and reliable, electrical and mechanical connection

HF Halogen Free

Specification.

Material:
Electro-tin plated copper

Insulation:
Nylon

Max. electrical rating:
- Red - 19 AMP
- Blue - 27 AMP
- Yellow - 48 AMP

600 Volts - max.
Max temperature 105˚C

Approvals:
RoHS compliant

			Dimensions (mm)						
Wire Ø mm²	**Part no.**	**Stud size D2 mm**	**B**	**L**	**F**	**E**	**D**	**D1**	**Pack quantity**
0.5 - 1.5 Red	**CNIF1-3**	3.2	5.8	22.0	6.3	11.0	4.1	1.7	100
	CNIF1-3.5	3.7	5.8	22.0	6.3	11.0	4.1	1.7	100
	CNIF1-4	4.3	6.6	21.6	6.3	11.0	4.1	1.7	100
	CNIF1-5	5.3	8.0	22.0	7.0	11.0	4.1	1.7	100
	CNIF1-6	6.5	9.5	22.0	7.0	11.0	4.1	1.7	100
1.5 - 2.5 Blue	**CNIF2-3**	3.2	6.4	18.5	4.3	11.0	4.5	2.3	100
	CNIF2-3.5	3.7	6.4	18.5	4.3	11.0	4.5	2.3	100
	CNIF2-4	4.3	6.6	20.5	6.3	11.0	4.5	2.3	100
	CNIF2-5	5.3	8.5	23.0	7.8	11.0	4.5	2.3	100
	CNIF2-6	6.5	12.0	28.0	11.0	11.0	4.5	2.3	100
	CNIF2-8	8.4	12.0	28.0	11.0	11.0	4.5	2.3	100
4-6 Yellow	**CNIF3-3.5**	3.7	7.2	22.5	5.9	13.0	6.5	3.4	50
	CNIF3-4	4.3	7.2	22.5	5.9	13.0	6.5	3.4	50
	CNIF3-5	5.3	9.5	26.0	8.3	13.0	6.5	3.4	50
	CNIF3-6	6.5	12.0	29.5	10.5	13.0	6.5	3.4	50
	CNIF3-8	8.4	15.0	34.2	13.7	13.0	6.5	3.4	50