Cablecraft

Technical Data.

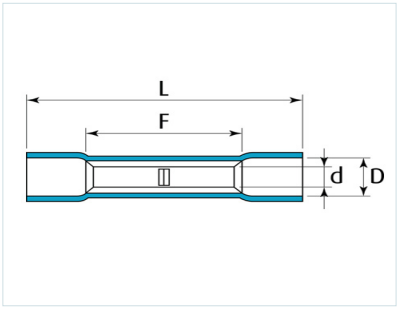

Pre-insulated nylon butt connectors.

Key features.

- Made from oxygen-free high conductivity copper
- Electro-tin plated for excellent conductivity and resistance to corrosion
- Create a secure and reliable, electrical and mechanical connection

HF Halogen Free

Specification.

Material:
Electro-tin plated copper

Insulation:
Nylon

Max. electrical rating:
- Red - 19 AMP
- Blue - 27 AMP
- Yellow - 48 AMP

600 Volts - max.
Max temperature 105˚C

Insulation:
RoHS compliant

		Dimensions (mm)				
Wire Ø mm²	**Part no.**	**L**	**F**	**d**	**D**	**Pack quantity**
0.5 - 1.5 Red	**CNIBC1**	26.0	15.0	1.7	4.1	100
1.5 - 2.5 Blue	**CNIBC2**	26.0	15.0	2.3	4.5	50
4 - 6 Yellow	**CNIBC3**	27.0	15.0	3.6	6.5	50

01582 606033 | **sales@cablecraft.co.uk** | **cablecraft.co.uk**
Cablecraft House, Circle Business Centre, Blackburn Road, Houghton Regis, Bedfordshire, LU5 5DD

Registered in England and Wales at 12 Charterhouse Square, London EC1M 6AX | Company registration number 02478297