Cablecraft

Technical Data.

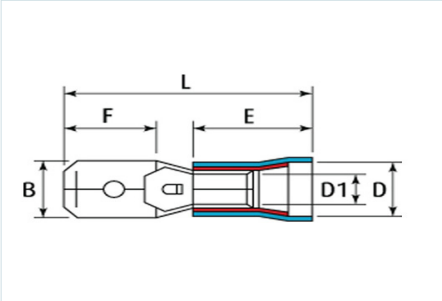

Insulated PVC push-on male terminals.

Key features.

- Suitable for wires from 0.25mm² to 6.0mm²
- Made from copper-alloy, electro tinned, with a copper reinforcement sleeve
- High mechanical and dielectric resistant insulation, with heat resistant up to +75˚C

Specification.

Material:
Brass tin-plated

Insulation:
Polyvinyl chloride

Max. electrical rating:
- Red - 10 AMP
- Blue - 15 AMP
- Yellow - 24 AMP

300 Volts - max.
Max temperature 75˚C

Approvals:
RoHS compliant

		For tab		Dimensions (mm)						
Wire Ø mm²	Part no.	Width (mm)	Thick (mm)	B	F	L	E	D	D1	Pack quantity
0.5 - 1.5 Red	CIPOM1	6.35	0.8	6.4	7.8	21.2	10.0	4.3	1.7	100
	CIPOM1-4.8x	4.8	0.5	4.8	7.8	20.5	10.0	4.0	1.7	100
	CIPOM1-2.8X	2.8	0.8	2.8	7.8	20.5	10.0	4.0	1.7	100
1.5 - 2.5 Blue	CIPOM2	6.35	0.8	6.4	7.8	21.2	10.0	5.0	2.3	100
	CIPOM2-4.8x	4.8	0.8	4.8	7.0	19.2	10.0	4.5	2.3	100
4 - 6 Yellow	CIPOM3	6.35	0.8	6.4	7.8	23.7	12.5	6.5	3.4	50

01582 606033 | **sales@cablecraft.co.uk** | **cablecraft.co.uk**
Cablecraft House, Circle Business Centre, Blackburn Road, Houghton Regis, Bedfordshire, LU5 5DD

Registered in England and Wales at 12 Charterhouse Square, London EC1M 6AX | Company registration number 02478297