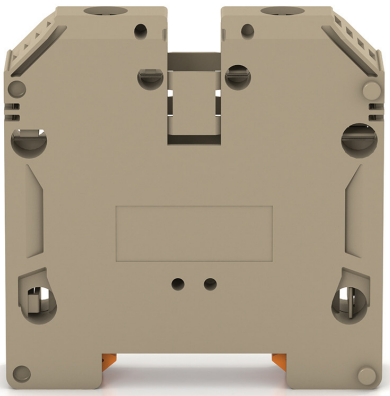

TECHNICAL DATA SHEET: SRK 50/2A - WIRE CROSS SECTION 50mm²

DESCRIPTION:

Cablecraft SRK 50/2A is suitable for wire size 50mm² and features screw cross-connectors and a more rigid construction on the rail. The operating temperature is -40°C to +120°.

SPECIFICATION:

HF Halogen Free

MATERIAL: Polyamide 6.6 UL 94 - V0

DIN RAIL TYPE: Foot can be snapped on to TS 35 DIN rail

STANDARDS: IEC, UL and CSA approval pending

HOW TO ORDER:
Add the required colour to the end of the part number.

OTHER COLOURS AVAILABLE

PART NUMBERS:



RATED VOLTAGE/MAX CURRENT

PART NUMBER	IEC	CONDUCTOR mm²/AWG	PACK QUANTITY
TERMINAL BLOCK			
SRK 50/2A (COLOUR)	1000/192	50.0/8-0	1

ACCESSORY TYPE	PART NUMBER	PACK QUANTITY
SRK 50/2A ACCESSORIES		
Two Pole Cross Connector	SQ 50/2	1
Three Pole Cross Connector	SQ 50/3	1
Four Pole Cross Connector	SQ 50/4	1

CABLECRAFT™
creative wiring solutions

betaduct CABLECRAFT COMPANY

nqa ISO 9001 Registered UKAS QUALITY MANAGEMENT 015
CERTIFICATE NO. 9277

Link-up Registered
I.D. 22645

INVESTORS IN PEOPLE

CTT CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk
VAT NO. GB 639 920 900 • **CO. REG. NO.** 2478297

FILE NO. 3.09
ISSUE NO. 03