TECHNICAL DATA SHEET: RK 240 - WIRE CROSS SECTION 240mm²

DESCRIPTION:

Cablecraft RK 240 feed through terminal features a double-layer insulation housing. It is suitable for wire size 240mm² and has a unique foot contact on both sides allowing the terminal to be snapped on to TS 35 rail. The operating temperature is -40°C to +120°C.

SPECIFICATION:

HF Halogen Free

MATERIAL: Polyamide 6.6 UL 94 - V2

DIN RAIL TYPE: Foot can be snapped on to TS 35 DIN rail

STANDARDS: IEC, UL and CSA approved

HOW TO ORDER:
Add the required colour to the end of the part number.

OTHER COLOURS AVAILABLE

PART NUMBERS:

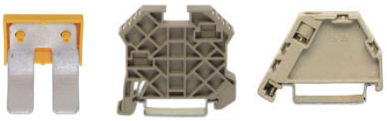

RATED VOLTAGE/MAX CURRENT

PART NUMBER	IEC	CONDUCTOR mm²/AWG	PACK QUANTITY
FEED-THROUGH TERMINAL			
RK 240 (COLOUR)	1000/380	240/500-2/0	1

ACCESSORY TYPE	PART NUMBER	PACK QUANTITY
RK 240 ACCESSORIES		
Two Pole Insulated Cross Connector	AQI 2/240	1
Three pole Insulated Cross Connector	AQI 3/240	1
End Stop - Snap On	SES 35	1
End Stop - Screw On	ES 35	1

FILE NO. 3.03
ISSUE NO. 03

CABLECRAFT™
creative wiring solutions

betaduct CABLECRAFT COMPANY

CERTIFICATE NO. 9277

I.D. 22645

INVESTORS IN PEOPLE

CTT CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk
VAT NO. GB 639 920 900 • **CO. REG. NO.** 2478297