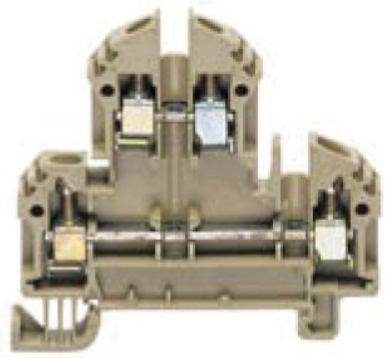

TECHNICAL DATA SHEET: RKD 2.5/35 - WIRE CROSS SECTION 2.5mm²

DESCRIPTION:

The RKD terminal blocks can be cross-connected at both levels. They have a width of 5mm and three levels with six connection points. They can handle solid or stranded wires up to 2.5mm². The operating temperature is -40°C to +120°C.

SPECIFICATION:

HF Halogen Free

MATERIAL: Polyamide 6.6 UL 94 - V2

DIN RAIL TYPE: Foot can be snapped on to TS 35 DIN rail

STANDARDS: IEC, UL and CSA approved

OTHER COLOURS AVAILABLE

HOW TO ORDER:
Add the required colour to the end of the part number.

PART NUMBERS:

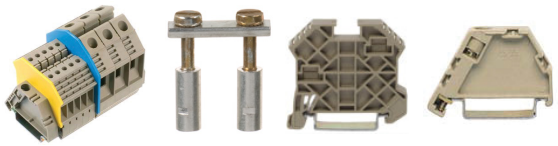

RATED VOLTAGE/MAX CURRENT

PART NUMBER	IEC	CONDUCTOR mm²/AWG	PACK QUANTITY
DOUBLE-DECK TERMINAL			
RKD 2.5/35 (COLOUR)	500/24	2.5/22-14	1

ACCESSORY TYPE	PART NUMBER	PACK QUANTITY
RKD 2.5/35 ACCESSORIES		
End Plate	AP 4	1
Two Pole Cross Connector	Q2-5mm	1
Three Pole Cross Connector	Q3-5mm	1
Four Pole Cross Connector	Q4-5mm	1
Ten Pole Cross Connector	Q10-5mm	1
End Stop - Snap On	SES35	1
End Stop - Screw On	ES35	1

FILE NO. 3.12
ISSUE NO. 03

CABLECRAFT™
creative wiring solutions

betaduct
CABLECRAFT COMPANY

nqa ISO 9001 Registered UKAS
CERTIFICATE NO. 9277

Link-up Registered
I.D. 22645

INVESTORS IN PEOPLE

CTT
CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk
VAT NO. GB 639 920 900 • **CO. REG. NO.** 2478297