Cablecraft

Technical Data.

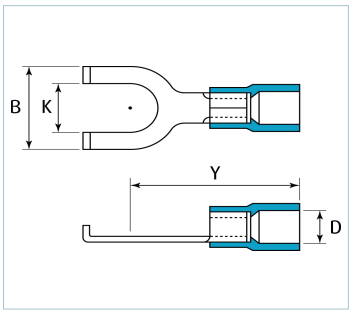

Pre-insulated nylon flanged fork terminals.

Key features.

- Made from oxygen-free high conductivity copper
- Electro-tin plated for excellent conductivity and resistance to corrosion

HF Halogen Free

Specification.

Material:
Electro-tin plated copper

Insulation:
Nylon

Max. electrical rating:
- Red - 19 AMP
- Blue - 27 AMP
- Yellow - 48 AMP

600 Volts - max.
Max temperature 105˚C

Approvals:
RoHS compliant

			Dimensions (mm)				
Wire Ø mm²	**Part no.**	**Stud size D2 mm**	**D**	**Y**	**B**	**K**	**Pack quantity**
0.5 - 1.5 Red	**CNIFF1-3.5**	3.5	4.15	19.9	5.5	3.7	100
	CNIFF1-4	4	4.15	19.4	6.5	4.3	100
	CNIFF1-5	5	4.15	19.9	8.5	5.3	100
	CNIFF1-6	6	4.15	20.1	9.5	6.5	100
1.5 - 2.5 Blue	**CNIFF2-3.5**	3.5	4.75	20.4	5.8	3.7	100
	CNIFF2-4	4	4.75	20.4	6.5	4.3	100
	CNIFF2-5	5	4.75	21.2	8.5	5.3	100
	CNIFF2-6	6	4.75	21.2	9.5	6.5	100
4-6 Yellow	**CNIFF3-3.5**	3.5	6.5	24.2	7.6	3.7	50
	CNIFF3-4	4	6.5	24.2	8.5	4.3	50
	CNIFF3-5	5	6.5	23.6	9.5	5.3	50
	CNIFF3-6	6	6.5	24.2	9.5	6.4	50

01582 606033 | **sales@cablecraft.co.uk** | **cablecraft.co.uk**
Cablecraft House, Circle Business Centre, Blackburn Road, Houghton Regis, Bedfordshire, LU5 5DD

Registered in England and Wales at 12 Charterhouse Square, London EC1M 6AX | Company registration number 02478297