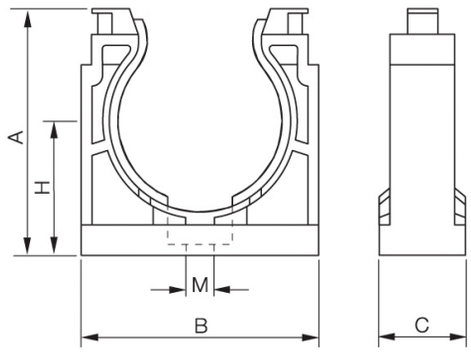

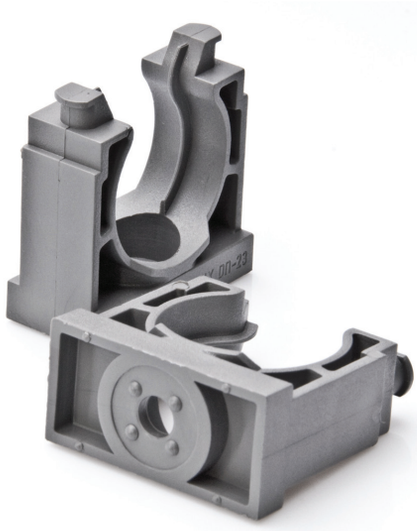

DESCRIPTION:

SDN supports are ideal for securing sections of corrugated conduits between the various parts of the electrical installation on machines. With conduit entry guide.

SPECIFICATION:

MATERIAL: Polyamide (PA 6) - Free of Halogen, Phosphorus and Cadmium. Self-Extinguishing, Shock Resistant

IP RATING: IP 66 Protection. IP68 with ORJ O-Rings

SERVICE TEMPERATURE RANGE: -40˚C to +105˚C

STANDARDS: EN 60204 (Safety of Machinery).

PART NUMBERS:

			DIMENSIONS (mm)					
PART NO. BLACK	PART NO. GREY	CONDUIT SIZE (mm)	A	B	C	H	M (Bolt)	PACK QTY
SDN-12B	SDN-12G	12	23	21	20	14	M5	10
SDN-16B	SDN-16G	16	26	25	20	15	M5	10
SDN-20B	SDN-20G	20	32	32	20	18	M5	10
SDN-25B	SDN-25G	25	41	40	20	23	M6	10
SDN-32B	SDN-32G	32	47	46	20	26	M6	10
SDN-40B	SDN-40G	40	57	56	20	32	M6	10
SDN-50B	SDN-50G	50	70	70	20	39	M6	10

CABLECRAFT
creative wiring solutions

betaduct CABLECRAFT COMPANY

CERTIFICATE NO. 9277

I.D. 22645

INVESTORS IN PEOPLE

CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk
VAT NO. GB 639 920 900 • **CO. REG. NO.** 2478297

FILE NO. 11.13
ISSUE NO. 02